

# 30 Understanding Access and Trunk Links in VLANs

## 30.1 Theory

The links connecting the end devices are called access links. These are the links usually carrying the Data VLAN information. The link between the switches is called trunk link. It carries packets from all the VLANs.

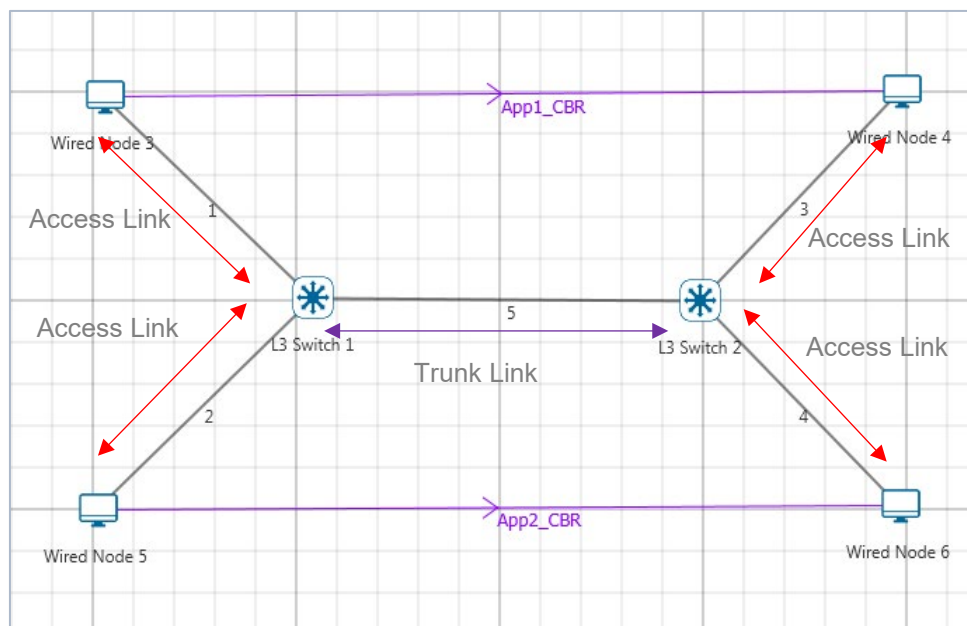


Figure 30-1: Understanding Access and Trunk Links in VLANs

### Access link

Access link connection is the connection where switch port is connected with a device that has a standardized Ethernet NIC. Standard NIC only understand IEEE 802.3 or Ethernet II frames. Access link connection can only be assigned with single VLAN. That means all devices connected to this port will be in same broadcast domain.

For example twenty users are connected to a hub, and we connect that hub with an access link port on switch, then all of these users belong to same VLAN. If we want to keep ten users in another VLAN, then we need to plug in those ten users to another hub and then connect it with another access link port on switch.

## Trunk link

Trunk link connection is the connection where switch port is connected with a device that is capable to understand multiple VLANs. Usually trunk link connection is used to connect two switches. A VLAN can span anywhere in network, and that can happen due to trunk link connection. Trunking allows us to send or receive VLAN information across the network. To support trunking, original Ethernet frame is modified to carry VLAN information.

## 30.2 Network Setup

Open NetSim and click **Examples > Experiments > Understanding-Access-and-Trunk-Links-in-VLANs** as shown below **Figure 30-2**.

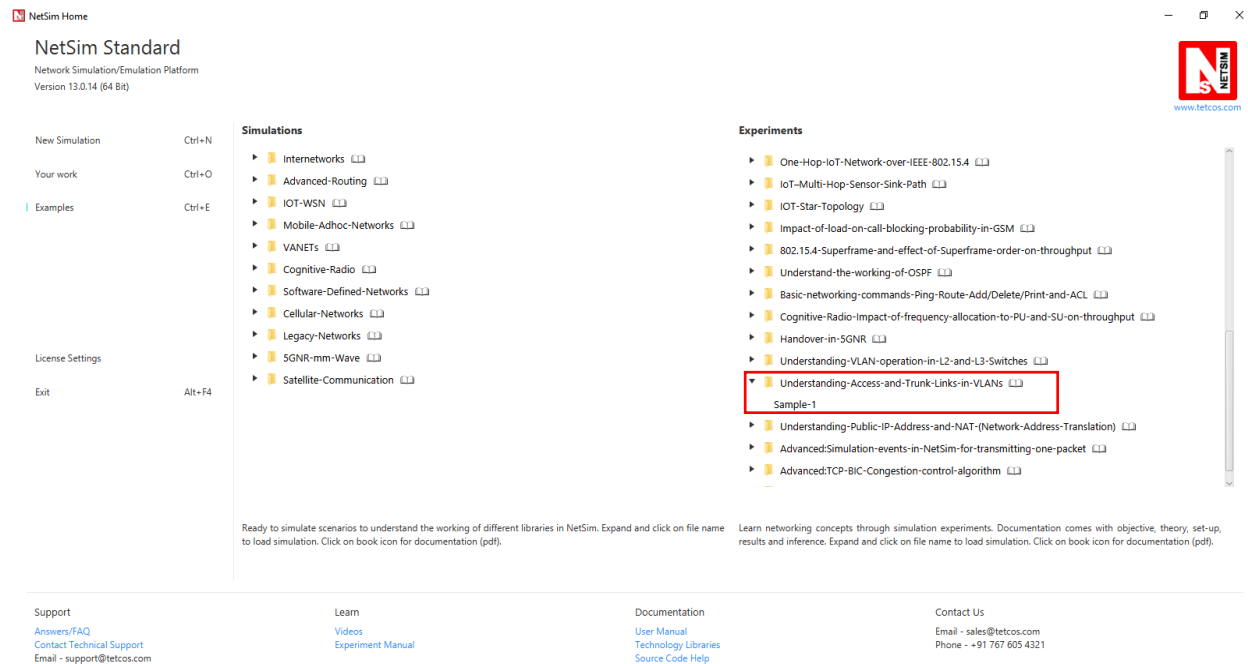


Figure 30-2: Experiments List

NetSim UI displays the configuration file corresponding to this experiment as shown below **Figure 30-3**.

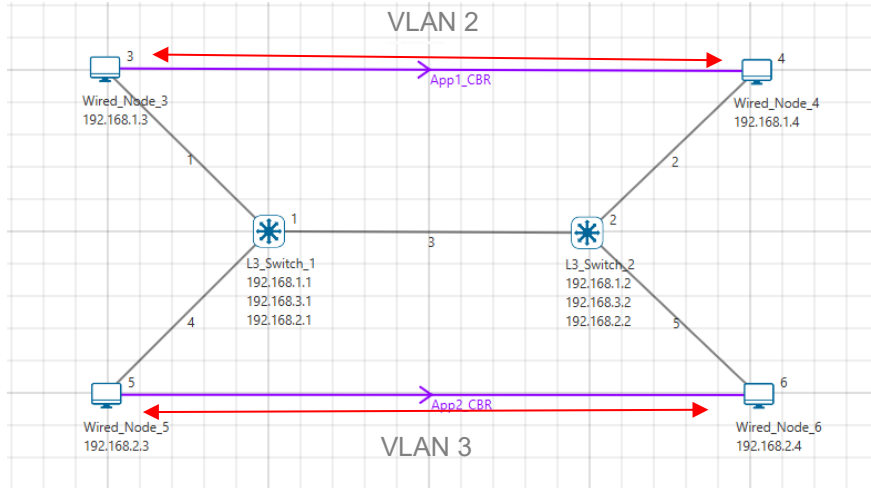


Figure 30-3: Network Topology in this experiment

### 30.3 Procedure

The following set of procedures were done to generate this sample:

**Step 1:** A network scenario is designed in NetSim GUI comprising of 4 Wired Nodes and 2 L2 Switches in the “**Internetworks**” Network Library.

**Step 2:** In the INTERFACE (ETHERNET) > NETWORK LAYER Properties, set the following **Table 30-1**.

Node	Wired Node 3	Wired Node 4	Wired Node 5	Wired Node 6
	I/f1_Ethernet	I/f1_Ethernet	I/f1_Ethernet	I/f1_Ethernet
IP Address	192.168.1.3	192.168.1.4	192.168.2.3	192.168.2.4
Default Gateway	192.168.1.1	192.168.1.2	192.168.2.1	192.168.2.2
Subnet Mask	255.255.255.0	255.255.255.0	255.255.255.0	255.255.255.0

Table 30-1: Network Layer Properties

**NOTE:** The subnet mask of all L3 Switch interfaces is set to 255.255.255.0

**Step 3:** L3 Switch 1 and L3 Switch 2 properties are set as follows:

Switch	I/f1_Ethernet	I/f2_Ethernet	I/f3_Ethernet
	IP Address	IP Address	IP Address
L3 Switch 1	192.168.1.1	192.168.3.1	192.168.2.1
L3 Switch 2	192.168.1.2	192.168.3.2	192.168.2.2

Table 30-2: L3 Switch 1 and L3 Switch 2 properties

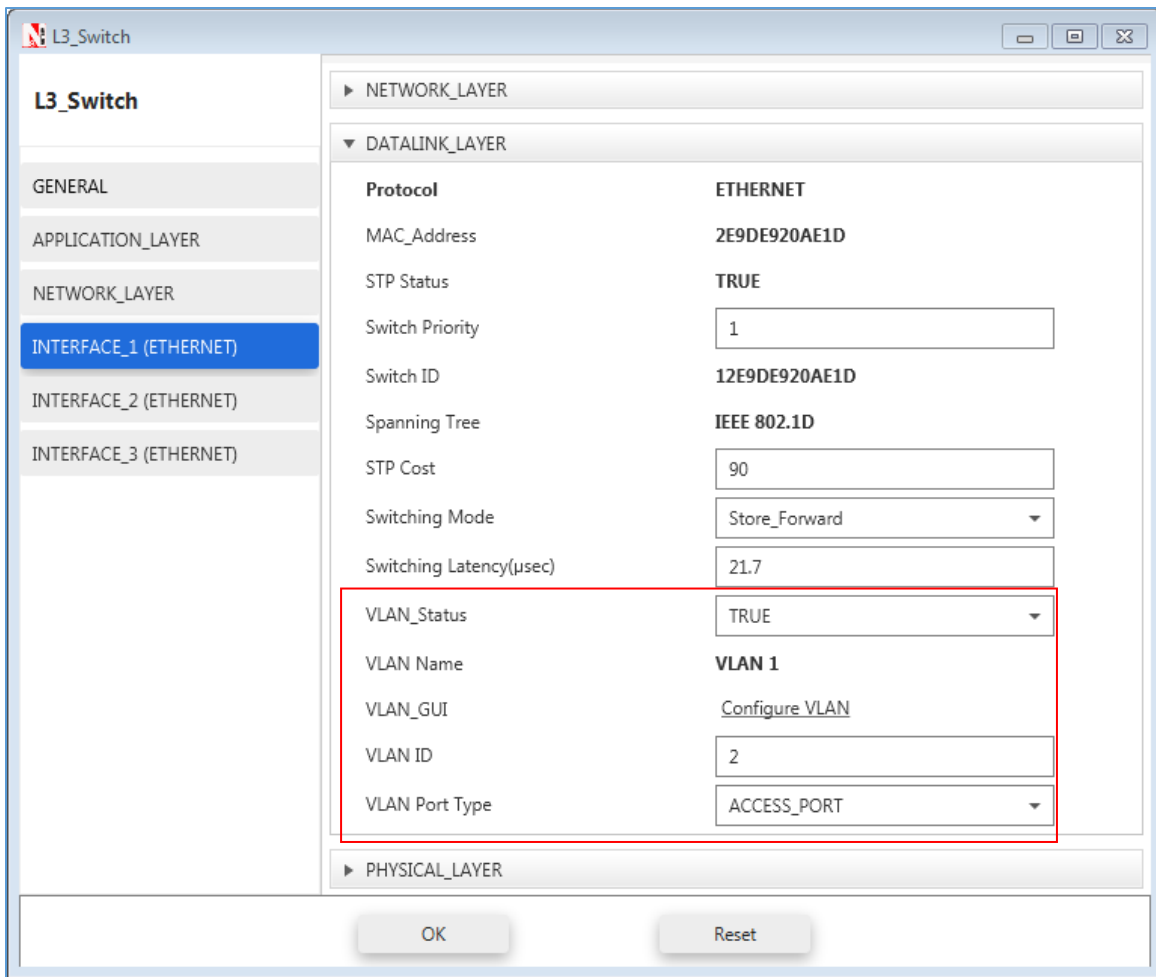


Figure 30-4: Datalink layer properties window

L3 Switch 1			
Interface ID	VLAN Status	VLAN ID	VLAN Port Type
Interface_1	TRUE	2	Access_Port
Interface_2	TRUE	1	Trunk_Port
Interface_3	TRUE	3	Access_Port

Table 30-3: VLAN Properties for L3 Switch 1

L3 Switch 2			
Interface ID	VLAN Status	VLAN ID	VLAN Port Type
Interface_1	TRUE	2	Access_Port
Interface_2	TRUE	1	Trunk_Port
Interface_3	TRUE	3	Access_Port

Table 30-4: VLAN Properties for L3 Switch 2

**Step 4:** In the INTERFACE (ETHERNET) > DATALINK LAYER Properties of L3 Switch 1, Click on “**Configure VLAN**” to view the properties for VLAN 2 set as per the screenshot shown below **Figure 30-5**.

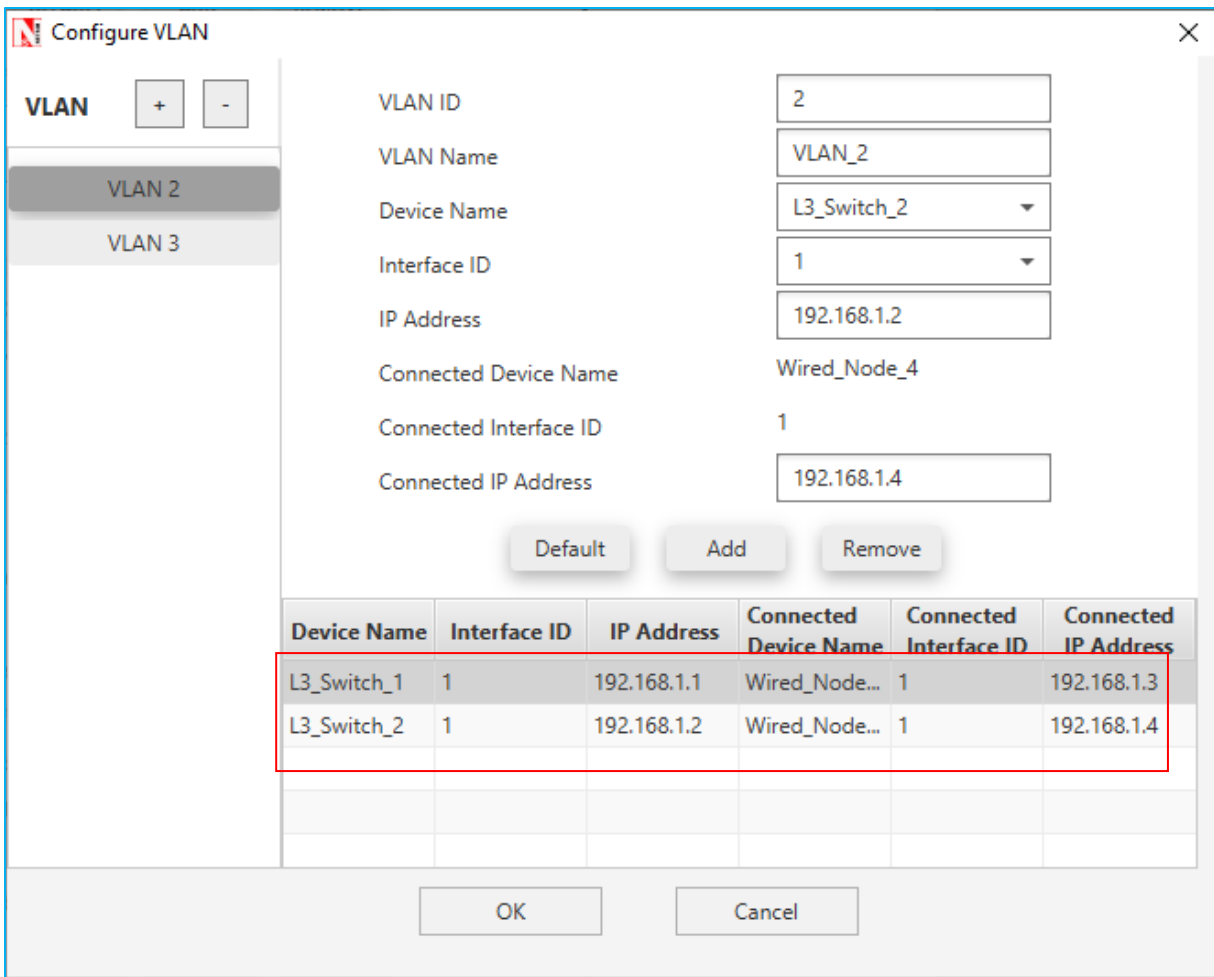


Figure 30-5: Configuring VLAN Properties in VLAN 2

Properties for VLAN 3 is set as per the below screenshot **Figure 30-6**.

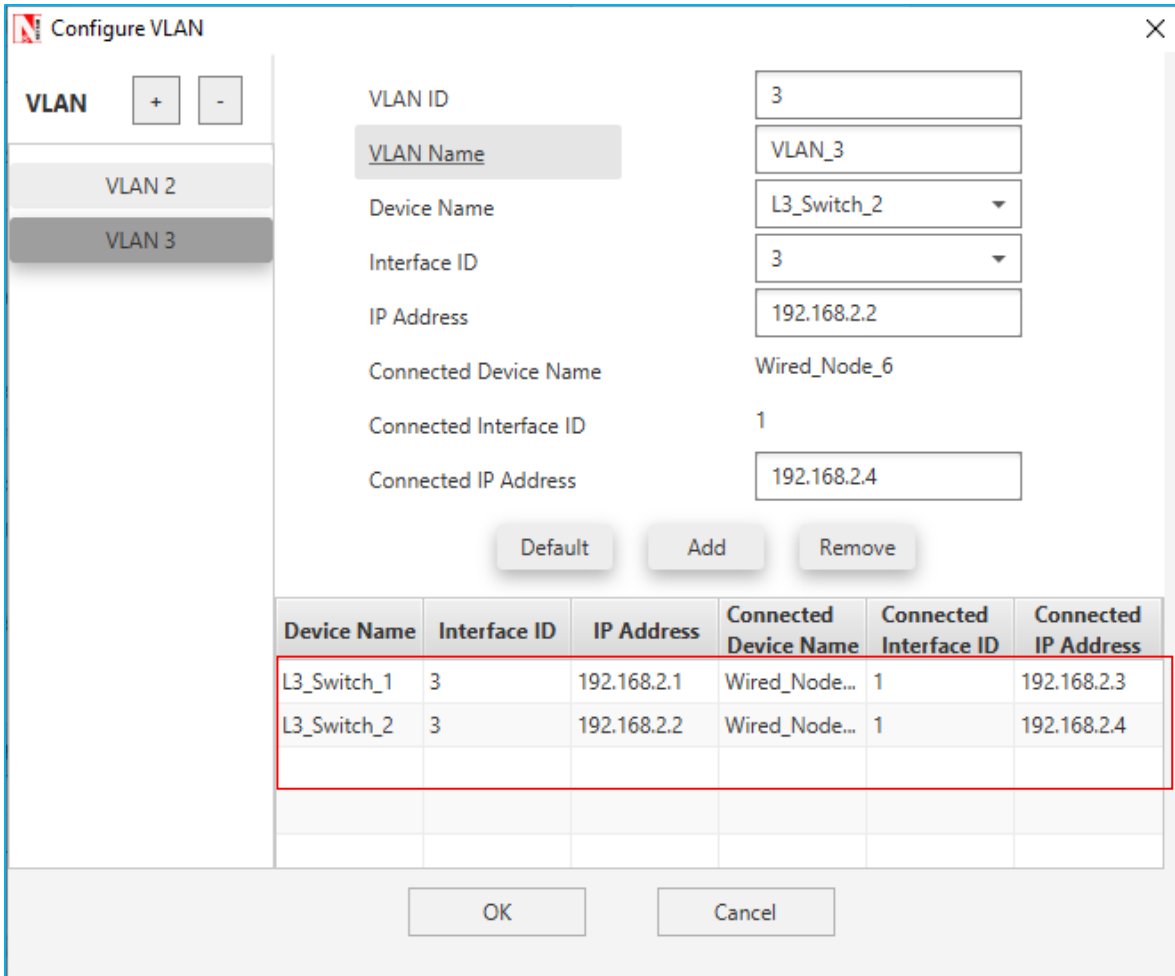


Figure 30-6: Configuring VLAN Properties in VLAN 3

After setting the properties of VLAN2 and VLAN3 click on OK.

**Step 5:** In the NETWORK LAYER Properties of L3 Switch 1, Enable - Static IP Route -> Click on **“Configure Static Route IP”** to set static route as per the screenshot shown below.

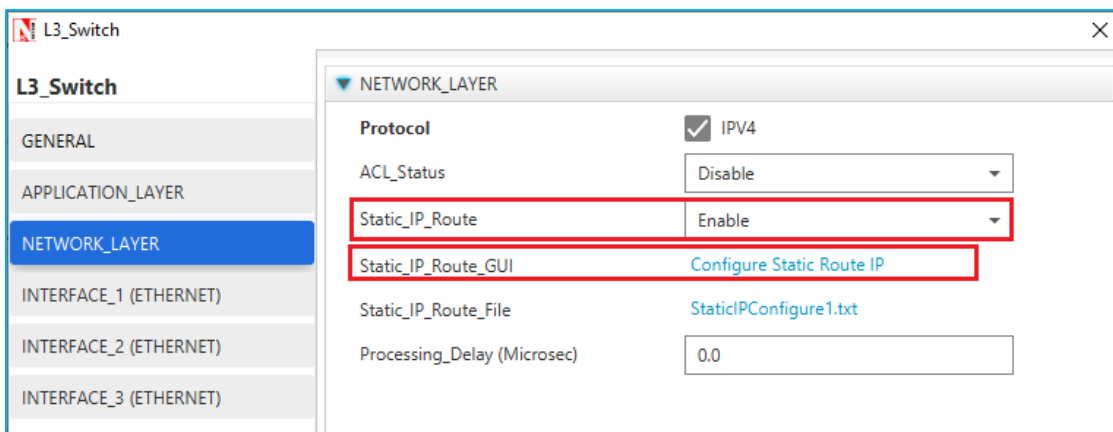


Figure 30-7: Select Configure Static Route IP

Set the properties in Static Route IP window as per the screenshot below and click on **Add**.  
Click on **OK**

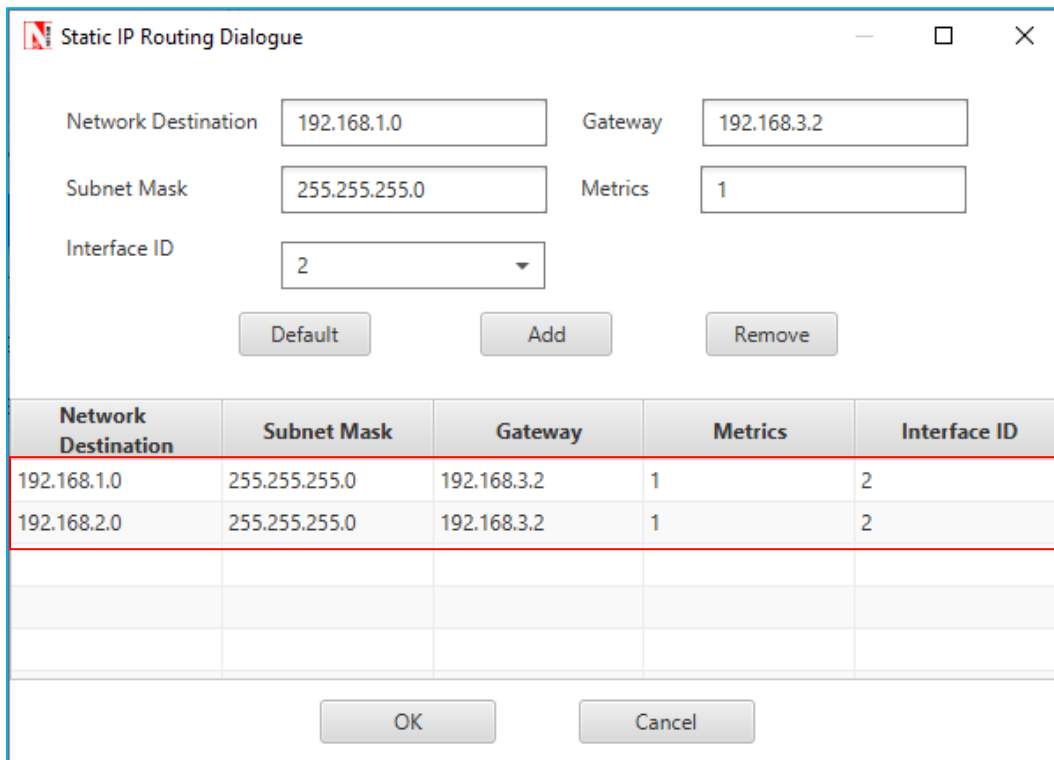


Figure 30-8: Configure Static route in Static Route IP window

**NOTE:** Transport Protocol is set to **UDP** in Application properties.

**Step 6:** Enable the plots and run simulation for 10 seconds and observe the throughput.

### 30.4 Output:

Throughput (Mbps)	
Application 1	0.58
Application 2	0.58

Table 30-5: Results Comparison

The above results conclude that trunking allows us to send or receive any VLAN information across the network.